

# Special-Sensors for Automation



## Temperature Sensors

- Compact model
- Programmable
- 2 Switching points
- Analog output



ISO 9001  
certified

## Technology and application

### Functionality

The compact models TN 552 GPP and TN 552/1 GPP have two independent adjustable switching points. The compact models TN 552 GAPP and TN 552/1 GAPP have one independent adjustable switching point and one scalable 4...20 mA analog output.

The detecting range for fluids is from  $-40\text{ }^{\circ}\text{C}$  to  $+120\text{ }^{\circ}\text{C}$ , the tolerance is  $0.3\text{ }^{\circ}\text{C}$  ( $0\text{...}80\text{ }^{\circ}\text{C}$ ).

The compact models TN 552... offer a window function as an alternative to the standard limit monitoring. Additionally, the NO/NC output function is programmable. Transient temperature changes can be bridged with a switch-on / switch-off time delay.

The push-buttons on the front of the sensor are used for programming the sensor functions. The programmed switching point and parameters are displayed and set by keyboard request. This function is possible while the sensor is measuring.

### Temperature sensor with threaded sleeve allowing for exchange during ongoing operations

The temperature sensor TN 553 can easily be exchanged during ongoing operations. This is made possible through the use of a special stainless steel (AISI 316 Ti) threaded sleeve that is mounted in the tank or pipe. In this way the compact device can at any time be removed without compromising the seal of the tank or pipe. The temperature sensor measures temperatures from  $-40^{\circ}$  to  $+120^{\circ}\text{ C}$  and offers, among other features, two programmable switching points, freely selectable hysteresis and a temperature window function. The device is available as a 24 V DC device with PNP or analog output as well as a 230 V and 115 V AC model with Opto-MOS. Various cable lengths and optional plug-in or hardwire connections allow the device to be installed in various configurations. The thread is a G1/2 gauge.

### Installation

EGE temperature sensors can be installed in standard T-pieces or welded T-pieces. The packing is made with an additional flat seal or with other suitable materials. Please note the temperature and pressure resistance of the seals for increased process conditions. Fixing the sensor in the T-pieces is only allowed on the screw head of the sensor. After the installation the display can be turned through an angle of  $330^{\circ}$  for best reading. In applications with temperature over  $+80\text{ }^{\circ}\text{C}$  the sensor should be mounted from the side into the pipe.

### Application

The hysteresis function is for controlling a temperature value. A limiting value can be programmed in this mode. As soon as the measured temperature is higher than the programmed limiting value, the output signals are switched as programmed (NC or NO). The hysteresis value is the difference temperature for the switch-on and switch-off signal of the limiting value. An additional time delay for the switching signals can be programmed for each switching point.

In the frame function mode the switching function is set depending of a programmed temperature range. The temperature range starts with the programmed lower value and end with programmed upper frame value.


The time delay for the switching signal can also be used in this switching mode.

The analog output can be use for transmitting the temperature and getting the proportional current. For that you assign one temperature for the 4 mA first-value and one temperature for the 20 mA last-value in the programming mode. Between the temperature values it is permissible to have a minimal difference of  $16\text{ }^{\circ}\text{C} / 29\text{ }^{\circ}\text{F}$ .


### Color code:

BK = black    BN = brown    BU = blue    WH = white

TN 552... GPP  
TN 553... GPP/WP

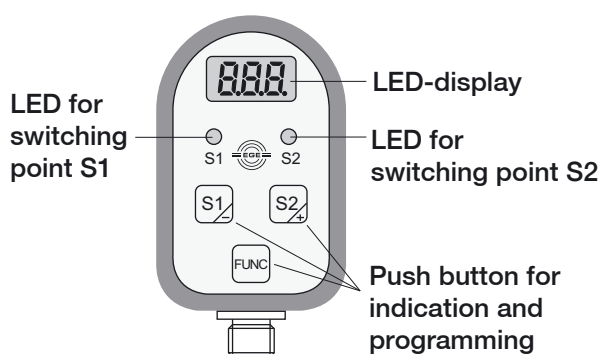

TN 552... GAPP  
TN 553... GAPP

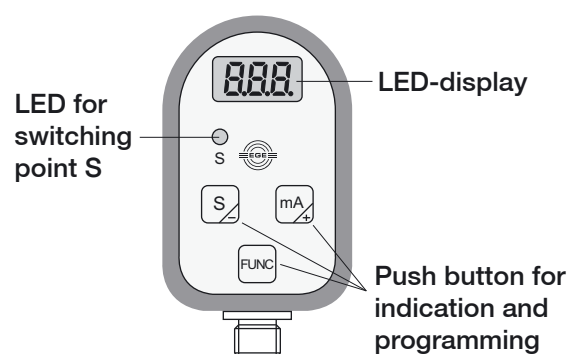

## Two switching points and analog output

### Series TN 553

Exchangeable during ongoing operations through use of threaded sleeve

Measuring range  $-40...+120\text{ }^{\circ}\text{C}$

Two switching points, hysteresis and temperature window easily programmable



Design	DC • G1/2		AC • G1/2
Dimensions			
Detection range [°C]	-40...+120		
Output	2x  PNP NC/NO	PNP NC/NO 4...20 mA	2x  NC/NO, progr.
ID-No.	P71021	P71022	P71023
Type	TN 553/1 GPP	TN 553/1 GAPP	TN 553/1 WP
Supply voltage [V]	24 DC $\pm 10\%$	24 DC $\pm 10\%$	230 AC $\pm 10\%$
Current consumption [mA]	60	60	20
Voltage drop [V]	<2.5	<2.5	<10
Ambient temperature [°C]	-20...+60		
Medium temperature [°C]	-40...+120		
Response time [s]	typ. 10...30		
Resolution display [°C]	0.1		
Range limit values [°C]	-39...+120 (0.5 / 1 Step)		
Range hysteresis [°C]	0.5...99 (0.5 / 1 Step)		
Range window [°C]	0.5...99 (0.5 / 1 Step)		
Time delay [s]	0...50 (0.5 / 1 Step)		
Programmable functions	two switching points, hysteresis/window, switching output NC/NO, MIN-/MAX- memory function		
Compressive strength [bar]	20		
Housing material	housing: PBT sensor and sleeve: AISI 316 Ti		
Protection [EN 60529]	IP 65		
Connection	M12 connector	1/2"-20UNF, 5-pol.	
Accessories	2x flat gasket, threaded sleeve, heat conducting paste		

## Two switching points

### Series TN 552

#### Measuring range

-40 °C...+120 °C / -40 °F...+248 °F


Two switching points, hysteresis and temperature window easily programmable

#### Rotable display

Switch-over °C - °F



Design	DC • G1/2 • L= 31 mm	DC • G1/2 • L= 48 mm
Dimensions		
Detection range	-40...+120 °C (-40...+248 °F)	
Output	2x  PNP NC/NO	
ID-No.	P71017	P71018
Type	TN 552 GPP	TN 552/1 GPP
Supply voltage [V]	24 DC ±10%	
Current consumption [mA]	<100	
Voltage drop [V]	<2.5	
Switching current [mA]	200	
Ambient temperature [°C]	-20...+60	
Medium temperature [°C]	-40...+120	
Response time [s]	typ. 10	
Resolution display [°C/°F]	0.1 / 0.5	
Range limit values [°C/°F]	-39...+120 / -39...248	(0.5 / 1 Step)
Range hysteresis [°C/°F]	0.5...99 / 1...179	(0.5 / 1 Step)
Range window [°C/°F]	0.5...99 / 1...179	(0.5 / 1 Step)
Time delay [s]	0...50	(0.5 / 1 Step)
Programmable functions	two switching points, hysteresis/window, switching output NC/NO, MIN-/MAX- memory function	
Compressive strength [bar]	100	
Housing material	housing: PBT sensor: AISI 316 Ti	
Protection [EN 60529]	IP 65	
Connection	M12 connector	



Accessories

see page 7.06

## Switching point and analog output

### Series TN 552

#### Measuring range




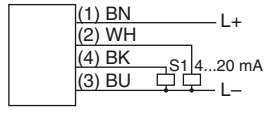
-40 °C...+120 °C / -40 °F...+248 °F

Switching point and analog output, hysteresis and temperature window easily programmable

#### Rotable display

Switch-over °C - °F

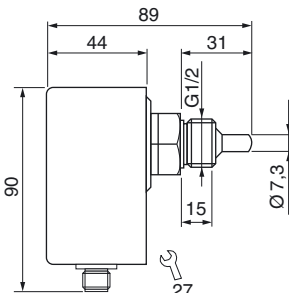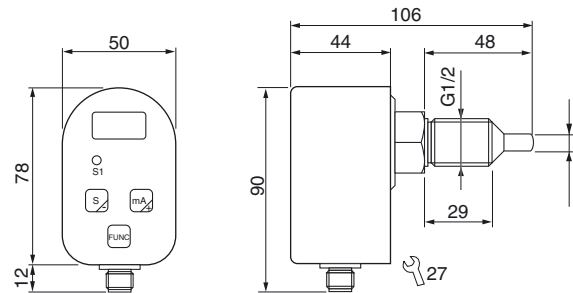






Design	DC • G1/2 • L= 31 mm	DC • G1/2 • L= 48 mm
Dimensions		
Detection range	-40...+120 °C (-40...+248 °F)	
Output		
ID-No.	P71019	P71020
Type	TN 552 GAPP	TN 552/1 GAPP
Supply voltage [V]	24 DC ±10%	
Current consumption [mA]	<200	
Voltage drop [V]	<2.5	
Analog output [mA]	4...20, scalable, Detection range min. 16 °C / 29 °F	
Switching current [mA]	200	
Ambient temperature [°C]	-20...+60	
Medium temperature [°C]	-40...+120	
Response time [s]	typ. 10	
Resolution display [°C/°F]	0.1 / 0.5	
Range limit values [°C/°F]	-39...+120 / -39...248	(0.5 / 1 Step)
Range hysteresis [°C/°F]	0.5...99 / 1...179	(0.5 / 1 Step)
Range window [°C/°F]	0.5...99 / 1...179	(0.5 / 1 Step)
Time delay [s]	0...50	(0.5 / 1 Step)
Programmable functions	one switching point, hysteresis/window, switching output NC/NO, MIN- / MAX- memory function	
Compressive strength [bar]	100	
Housing material	housing: PBT sensor: AISI 316 Ti	
Protection [EN 60529]	IP 65	
Connection	M12 connector	
		
Accessories	see page 7.06	

## Accessories

### M12 connector System SL

### Finished cable plug casing Self locking screw plug Protection IP 67

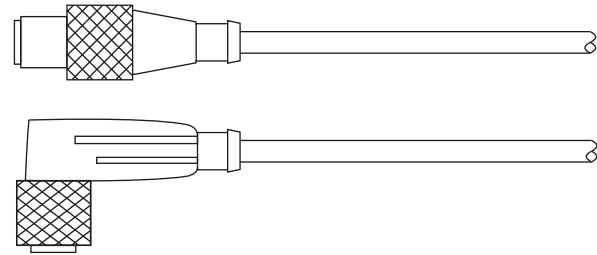

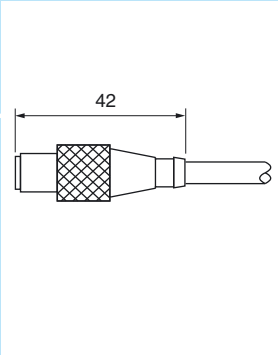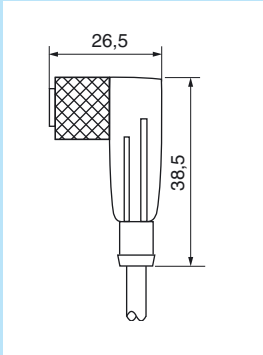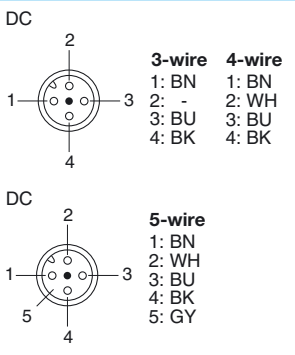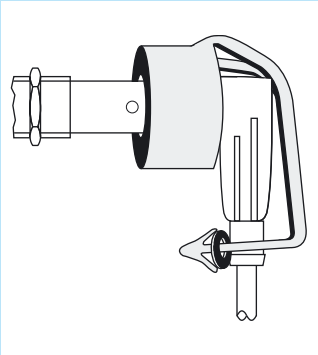Cable plug housing straight	Cable plug housing angular	Pin-assignment	Plug-lock
		<p>DC</p>  <p>3-wire 1: BN 2: - 3: BU 4: BK</p> <p>4-wire 1: BN 2: WH 3: BU 4: BK</p> <p>5-wire 1: BN 2: WH 3: BU 4: BK 5: GY</p>	
SLG...	SLW...	DC	PL-M12

TYPE	ID-NO.	DESIGN
SLG 3-2	Z01076	Cable plug housing M12 DC, straight 2 m PVC-cable 3x0.34 mm <sup>2</sup>
SLG 3-5	Z01077	Cable plug housing M12 DC, straight 5 m PVC-cable 3x0.34 mm <sup>2</sup>
SLW 3-2	Z01078	Cable plug housing M12 DC, angular 2 m PVC-cable 3x0.34 mm <sup>2</sup>
SLW 3-5	Z01079	Cable plug housing M12 DC, angular 5 m PVC-cable 3x0.34 mm <sup>2</sup>
SLW 3-2-LED	Z00052	Cable plug housing M12 DC, angular 2 m PVC-cable 3x0.34 mm <sup>2</sup> PNP with LED
SLG 4-2	Z00445	Cable plug housing M12 DC, straight 2 m PVC-cable 4x0.25 mm <sup>2</sup>
SLG 4-5	Z00449	Cable plug housing M12 DC, straight 5 m PVC-cable 4x0.25 mm <sup>2</sup>
SLW 4-2	Z00446	Cable plug housing M12 DC, angular 2 m PVC-cable 4x0.25 mm <sup>2</sup>
SLW 4-5	Z00450	Cable plug housing M12 DC, angular 5 m PVC-cable 4x0.25 mm <sup>2</sup>
SLW 4-2-LED	Z01157	Cable plug housing M12 DC, angular 2 m PVC-cable 4x0.25 mm <sup>2</sup> PNP with LED
SLG 5-2	Z01150	Cable plug housing M12 DC, straight 2 m PVC-cable 5x0.34 mm <sup>2</sup>
SLW 5-2	Z01151	Cable plug housing M12 DC, angular 2 m PVC-cable 5x0.34 mm <sup>2</sup>
PL-M12	Z01182	Plug-lock for sensors in Ex areas

### TECHNICAL DATA

Protection	IP 67	Rated voltage	250 VDC
Contact resistance	≤ 5 mΩ	Insulation resistance	>10 <sup>9</sup> Ω
Switching current	4A (CSA=3A)	Testing voltage	2.0 KV eff.
Temperature range	-25...+80 °C		

### Note

Sensors with NC output are connected to 4 pole cable plug housings. In this case, the break output is connected to the white lead (connection 2).

## A selection

### Flow sensors

- Electronical monitoring of flow
- Lubrication monitoring
- Measuring range 1 ml/min...100 l/min
- Detection range 1...300 cm/s
- Reaction time 0.5 s

### Level sensors for Ex-applications

- For level monitoring in Ex areas
- For temperatures  $-35...+200\text{ }^{\circ}\text{C}$
- With PTFE connector cable
- Sensors for connection to amplifiers

### Level sensors

- For level monitoring  $-230...+230\text{ }^{\circ}\text{C}$
- Steam proof at a pressure of up to 30 bar
- For hot motor oil
- For liquid nitrogen
- For chemically aggressive media

### Ultrasonic sensors

- Switching distance up to 5000 mm
- Level monitoring
- Watertight housing
- Teach-in functions

### Pressure sensors

- Monitoring in pipes and containers
- Pressure up to 16 bar
- Level up to 10 m ( $\pm 1\text{ cm}$ )
- Compact models
- Programmable

### Infrared detectors

- Measurement of temperature
- Monitoring of hot media
- Position control





**Headquarters**  
**EGE-Elektronik**  
**Spezial-Sensoren GmbH**

Ravensberg 34  
D-24214 Gettorf  
Tel. +49 (0) 4346 / 41580  
Fax +49 (0) 4346 / 5658

Internet: [www.ege-elektronik.com](http://www.ege-elektronik.com)



**EGE-Elektronik ApS**  
Forstallé 79  
DK-6200 Aabenraa  
Tel. +45 70207271  
Fax +45 70207272



**EGE-Specialsensorer AB**  
Box 137  
S-51223 Svenljunga  
Tel. +46 32512060  
Fax +46 32512064



**Stork AS**  
Brynsveien 100  
N-1352 Kolsås  
Tel. +47 67176400  
Fax +47 67176401



**Woodhead Connectivity s.a.**  
57, Rue Jacquard - Z.I.  
F-77400 Lagny Sur Marne  
Tel. +33 164309136  
Fax +33 164309105



**Cematic-Electric B.V.**  
Postbus 777  
NL-7550 AT Hengelo  
Tel. +31 742433422  
Fax +31 742913333



**ICM Ital Control Meters Srl**  
Via della Valle 67  
I-20048 Carate Brianza (MI)  
Tel. +39 0362 8052 00  
Fax +39 0362 8052 01



**Bibus Spain, S. L.**  
Rua do Arroncal, Vial C – Nave 4A  
ES-36350 Nigran  
Tel. +34 986 247286  
Fax +34 986 209247



**Powelectrics Limited**  
Sandy Hill Park, Sandy Way  
Amington, Tamworth  
GB-Staffordshire B77 4DU  
Tel. +44 1827310666  
Fax +44 1827310999



**Bachofen AG**  
Ackerstraße 42  
CH-8610 Uster  
Tel. +41 449441111  
Fax +41 449441233



**EMS Electronics Ltd.**  
Ballycarney, Green Road  
IRL., Carlow  
Tel. +353 599141768  
Fax +353 599137988



**Countapulse Controls (PTY) LTD.**  
P.O.B. 40393  
ZA-2022 Cleveland  
Tel. +27 116157556  
Fax +27 116157513



**HITECH Ltd.**  
1-35-2 Simouma, Setagaya,  
JPN-Tokyo 154-0002  
Tel. +81 35430 2301  
Fax +81 35430 2302



**Micromax S&A P/L**  
Unit 2 106-110 Beaconsfield Street  
AUS-Silverwater NSW 2128  
Tel. +61 1300 362626  
Fax +61 1300 017100



**Protek Teknik Elektrik Ticaret ve Sanayi Ltd. Sti.**  
Okçumusa Cad. Kismet Han 94/2  
TR-80020 Karaköy/Istanbul  
Tel. +90 2122377982  
Fax +90 2122354609



**IAC & Associates**  
2180 Fasan Drive  
Oldcastle  
CDN-Ontario N0R 1L0  
Tel. +1 519 7370311  
Fax +1 519 7370314



**Yuden-Tech Co., Ltd.**  
5F., No. 121, Lide St.,  
Zhonghe City, Taipei County 235,  
Taiwan (R.O.C.)  
Tel. +886 2 8221 2958  
Fax +886 2 8221 2492



**Shanghai Beishidietian Business Trade Co., Ltd.**  
4F, No. 88-1, Lane 7039,  
Zhongchun Rd., Minhang Area  
Shanghai City  
Tel. +86 21 54887307  
Fax +86 21 54887305



**CSE-W. Arthur Fischer Ltd.**  
15 Polaris Place, Greenmount  
NZ-East Tamaki, Auckland  
Tel. +64 9271 3810  
Fax +64 9265 1362



**Kolektor Synatec d.o.o.**  
Vojkova ul. 8b,  
PO Box 57  
SI-5280 Idrija  
Tel. +386 5 3720650  
Fax +386 5 3720660