Sensors for zone 2/22 with integrated electronics | IGEX22c 15 GSP

- Ex area of use: Zone 2 and Zone 22
- IECEx-certification / ATEX certificate of conformity
- External amplifier not required as no intrinsically safe supply necessary
- Explosion protection realized by type of protection "increased safety" and "protection by enclosure"
- Installation and commissioning in accordance with EN 60079-14

M30x1.5 - sn 15 mm non flush - Output PNP-NO

TYPE	IGEX22c 15 GSP
Product ID	P31396
Thread/sleeve	M30x1,5
Operating Distance sn	15 mm non-flush
Output	switching output
Output function	PNP-NO
Supply voltage	24 V DC +/- 10%
Switching current max.	100 mA
Rated voltage max.	30 V DC
Switching frequency	300 Hz
Ex area uf use	Zone 2, Zone 22
IECEx Certificate	IECEx EPS 17.0042X
UKEX Certificate	EPS 22 UKEX 1 270 X
Certificate of conformity	EPS 17 ATEX 1 085 X
ATEX marking gas	Ex II 3G Ex ec IIC T6...T3 Gc
ATEX Marking dust	Ex II 3D Ex tc IIIC T75°C Dc
IECEx marking gas	Ex ec IIC T6...T3 Gc
IECEx marking dust	Ex tc IIIC T75°C Dc
Ambient temperature gas T6 in zone 2	-20 °C ... 60 °C
Ambient temperature gas T5 in zone 2	-20 °C ... 60 °C

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH

TEL. +49 4346 41580 . ege-elektronik.com

Ambient temperature gas T4 in zone 2	-20 °C ... 60 °C
Ambient temperature gas T3 in zone 2	-20 °C ... 60 °C
Ambient temperature dust in zone 22	-20 °C ... 60 °C
Material housing	brass-Ni, PA, POM
Display	LED yellow
Protection [EN 60529]	IP 67
Protective cap	x
Electrical connection	2 m PUR-cable 3x0,34 mm²
Note	with longer cable available on request

Technical Image

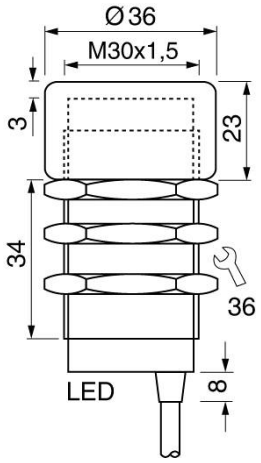

Pin Map

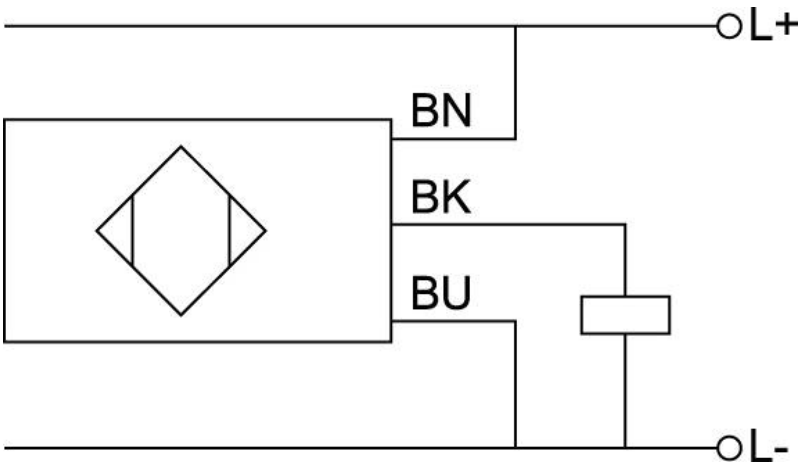

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 4346 41580 . ege-elektronik.com